


# Bekaert Crack Control Systems

## The use of reinforcement in crack control applications in type iii (M4) mortar

Bekaert have developed a range of masonry reinforcement products designed specifically to control cracking in masonry as covered by BS 5628 Part 3. Cracking may result from thermal movement, shrinkage, expansion, or localised stress concentration and Bricktor® is used in these situations.

To extend the distance between movement joints Brickforce® (a structural product) is used and a data sheet is available to cover this application.

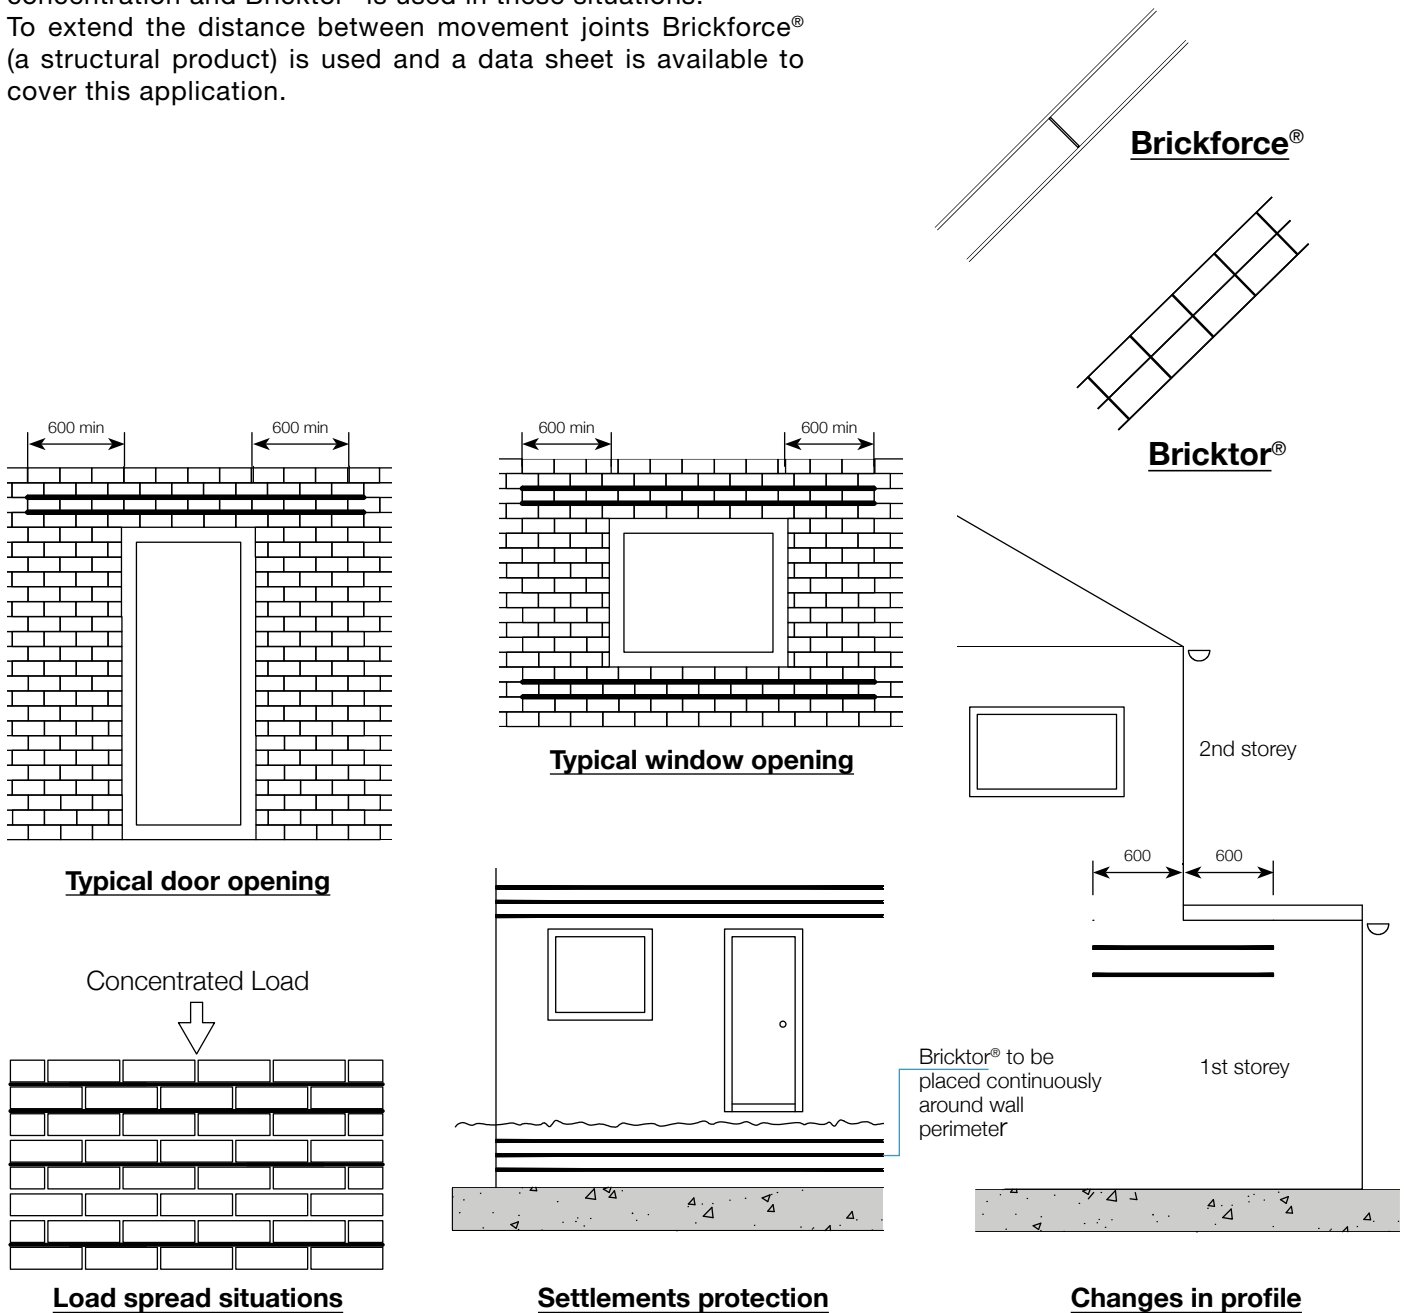

NV Bekaert offer free technical advice and a free design service to assist Masonry Designers.

For further information please contact our Technical Department: +44 1142 427 480 - [building.uk@bekaert.com](mailto:building.uk@bekaert.com)